



Data sheet actuator connection DIN 3337 / ISO 5211

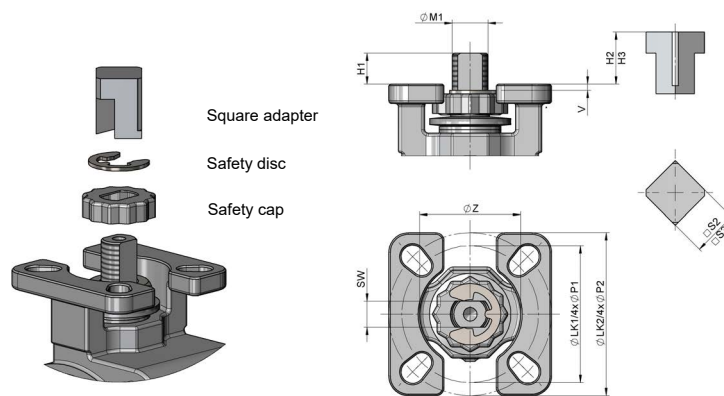

DN (F)	8 / 10	15 - 25	32 / 40	50
DN (R)	15	20 - 32	40 / 50	65
H1	7	8	9	13
LK1	36	42	42	50
LK2	42	50	50	70
$\varnothing M1$	8	9	11	14
$\varnothing P1$	6	6	6	7
$\varnothing P2$	6	7	7	9
SW	5.5	7	8	10
V	3.5	3	3.5	4.5
$\varnothing Z$	26	26	31	36
Square - adapter DIN 3337 / ISO 5211	F03 / F04	F04 / F05	F04 / F05	F05 / F07
$\square S2$	9	11	11	14
$\square H2$	10	12	12	16
$\square S3$	11	14	14	17
H3	12	16	16	19

(F) = full bore

(R) = reduced bore

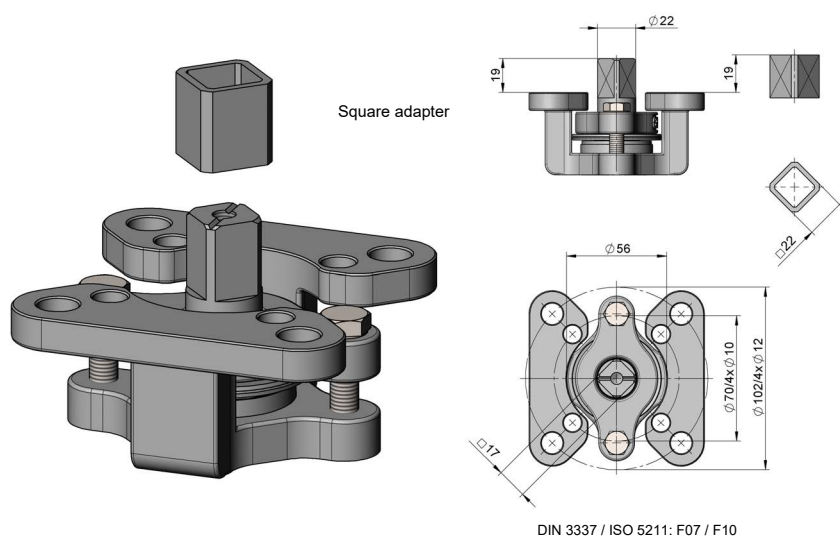

DIN 3337 / ISO 5211: F07 / F10

DN65 (F) – DN100 (F)

DN80 (R) - DN150 (R)

Subject to changes